

# MIG CARPRO 3 WITH ACCES.

MIG-MAG THREE PHASE SYNERGIC / 15 ▷ 200A

Ref. 031814 - 400V - 3φ

Ref. 033979 - DV 230/400V - 3φ




The MIG CARPRO 3 is a three phase MIG-MAG, with torch connector, recommended for welding steel, stainless steel, aluminium and for MIG brazing of high-tensile strength steels with CuSi and CuAl wires (ideal for car body repairs).

## Synergic Mode

The machine determines the optimum wire speed by selecting :

- the type of wire
- the wire diameter
- the welding current

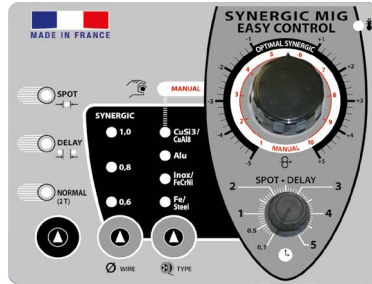

## Spool gun

**Upgradeable** - the MIG CARPRO 3 can be fitted with a Spool Gun torch. This motorised torch is suitable for ø100mm wire reels of aluminium, stainless steel, copper and steel in ø0.8mm.

- Ideal for soft wire such as the AISi5 or AISi12 (recommended for car body repairs)
- Ease of use : adjusting the wire speed on the Spool Gun torch directly.
- The machine is delivered with a balancing system to support the Spool Gun torch.



## 4 Drive rolls motor

Suitable for ø200mm and ø300mm wire reels (15kg max).


## Saving welding parameters

Memory save feature for each torch and activation of the 'last used' welding parameters (wire diameter, wire type and mode).

## Accessories

- Delivered with:
- 2 Steel torches 150A - 3m
  - 1 Spool Gun
  - 1 Earth clamp - 3m
  - 1 Balancing system (regulator not included)

## + PRODUIT



**2 torches, 2 integrated wire feeder + 1 Spool Gun** - The MIG CARPRO 3 is a multifunctional and flexible machine designed to weld 3 different type of wire or diameter at the same time. It's saving time by avoiding disassembling the torch and changing the wire reel for another job.

Capable of welding:

- Soft wires: as CuSi and CuAl necessary for welding HLE/THLE metal sheets
- Aluminium wires
- Steel wires

CE - EN 60974-1

50/60hz	AM	min▷max	ø mm	100	200	300	équipé d'origine / original equipment / originalausstattung / equipamiento de fabrica	EN60974-1 (40°C)	cm/kg	Protected & compatible POWER GENERATOR (+/- 15%)	Spool Gun	
400V	10A	15▷200A	0.6-1.0	✓	✓	4 Drive rolls motor	0.6-0.8	I <sub>A</sub> (60%)	X% (I <sub>2</sub> max)	60x90x90 72	5 kVA	Included
230/400V							0.8-1.0					